

Version:  
October 16, 2017



**(DRE)**

# High current Round Edge wound Resistors

**Token Electronics Industry Co., Ltd.**

**Taiwan:** No.137, Sec. 1, Zhongxing Rd., Wugu District,  
New Taipei City, Taiwan, R.O.C. 24872  
Tel: +886 2981 0109 Fax: +886 2988 7487

**China:** 12F, Zhong Xing Industry Bld., Chuang Ye Road,  
Nan Shan District, Shen Zhen City,  
Guang Dong, China 518054  
Tel: +86 755 26055363; Fax: +86 755 26055365

Web: [www.token.com.tw](http://www.token.com.tw)

Email: [rfq@token.com.tw](mailto:rfq@token.com.tw)



## ▶ Product Introduction

**Token coiling customer special round edge wound resistors fit renewable energy, load banks, dynamic braking, and inverters design**

### Features :

- Power Current from 5.1(A) to 105(A)
- Resistance nominal tolerance  $\pm 10\%$ (K)
- Resistance value range  $0.08\Omega$  to  $42.1\#937$ ;
- suitable for high current applications

### Applications :

- Power Industrial Machinery Resistors.
- Dynamic Braking Resistors, Load Banks, Motor Starting Resistor.
- Plugging Resistor, Electric Distribution Resistors.
- Wind Turbines, Harmonic Filters.

Token (DRE) Round Edge wound Resistor is a versatile, heavy-duty unit with lightweight construction, consisting of a non-corrodible, high quality stainless steel alloy. This tough resistor is appropriate for the following applications: VFD braking, motor control, load banks and neutral grounding applications.



(DRE) resistor includes through-rods, through-bars, fixed terminals, hardware and stainless steel element. It is supported by a mounting bar which is slotted at both ends. Fixed terminations are made by welding stainless steel tabs to either end of the element, or at various points for multiple connections. The ribbon-like element is coiled on edge in the form of a helix, and then spun onto a porcelain core which a threaded rod passing through the center of the ceramic core.

Token (DRE) series is also available in many mounting configurations such as stud mount version, universal edge wound, mounting bracket options of Vishay, or Ohmite. Many standard hardware options allow resistors to be purchased fully assembled, allowing easy integration into the final assembly. Assemblies are wired in parallel or in series to meet the needs of the application. Terminal blocks and thermal switches are also available.

Value-add wiring and connectors allow for a "plug-and-play" solution that easily integrates into the final assembly. Custom resistors are designed to order by our engineers and can be customized to fit unique electrical and mechanical constraints.

For more dynamic braking resistors, please link to Token official website "[High Power Resistors](http://www.token.com.tw)" to get more information. Or contact us with your specific needs.

### Customer special design options:

- Mechanical: Overall dimensions, mounting type, and configuration, insulation.
- Connection: Wire leads, connectors, terminal type, size, set-in, and material.
- Electrical: Tolerance, wattage, resistance, dielectric withstanding voltage, surge ability, temperature coefficient.



## DRE-P

### Round Edge wound Standard Dimensions (DRE-P)

High power (DRE) series edge power resistors are constructed by coiling a resistance-alloy ribbon wire and winding it on edge over specially designed ceramic insulators. The porcelain insulators separate coils of the resistance elements from each other and the frame. The advantage is an open coil construction is to easily accommodate surges and overloads that allow efficient heat dissipation.


#### Round Edge wound Construction:

- Insulators provide insulation from threaded stud mount and proper turn-to-turn spacing.
- A sturdy welded steel frame supports the refractory insulators and finished with a zinc chromate conversion for corrosion resistance.
- The resistance element is a stainless steel strip with negligible temperature coefficient and anti-corrosion features, used for its current carrying capacity vs Ohms per length.
- The resistance element is designed by edgewinding a stainless strip into a continuous coil of the proper scaling length.
- Zinc plated terminals are welded to the resistive wire for a reliable electrical connection.

Length Code	2		3		4		5		6		7		8		9	
Dimensions	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
A	228.6	9	285.75	11.25	381	15	438.15	17.25	615.95	24.25	615.95	24.25	762	30	838.2	33
B	177.8	7	254.0	10	330.2	13	406.4	16	457.2	18	558.8	22	635	25	711.2	28



Round Edgewound Resistor (DRE-P)

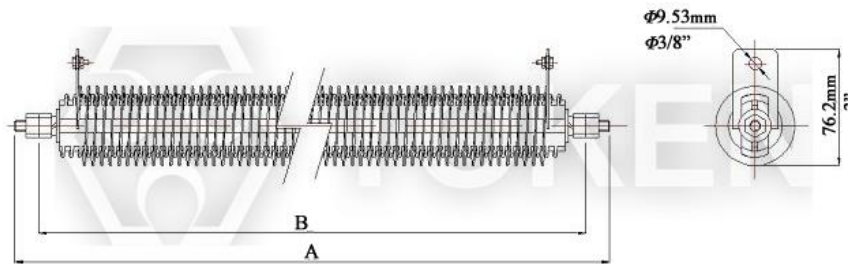

Round Edgewound Standard Dimensions (DRE-P)

### Edge wound Electrical Ratings (DRE-P)

Length Code	2	3	4	5	6	7	8	9
<b>Amps (A)</b>	<b>Resistance (<math>\Omega</math>) at 25°C, Resistance Tolerance (10%)</b>							
<b>11</b>	2.3	3.7	5.1	6.5	7.9	9.3	10.7	12.0
<b>12</b>	1.9	3.1	4.3	5.4	6.6	7.8	8.9	10.0
<b>18</b>	1.1	1.7	2.4	3.0	3.6	4.3	4.9	5.5
<b>21</b>	0.79	1.26	1.73	2.2	2.67	3.14	3.6	4.1
<b>24</b>	0.62	1.0	1.4	1.75	2.1	2.5	2.87	3.2
<b>27</b>	0.50	0.80	1.1	1.4	1.7	2.0	2.3	2.6
<b>29</b>	0.44	0.70	0.96	1.2	1.5	1.7	1.95	2.2
<b>35</b>	0.31	0.50	0.69	0.88	1.1	1.3	1.5	1.7
<b>40</b>	0.24	0.39	0.54	0.68	0.83	0.97	1.12	1.3
<b>45</b>	0.22	0.35	0.46	0.61	0.74	0.87	1.0	1.1
<b>50</b>	0.17	0.27	0.37	0.47	0.57	0.67	0.77	0.87
<b>60</b>	-	0.20	0.27	0.33	0.40	0.47	0.58	0.65
<b>70</b>	-	0.15	0.20	0.25	0.30	0.35	0.40	0.45
<b>85</b>	-	0.12	0.15	0.18	0.23	0.27	0.31	0.35
<b>105</b>	-	0.09	0.12	0.15	0.18	0.21	0.24	0.27

- The continuous current ratings are based on a 375°C temperature rise.
- The resistance values are measured at 25°C and have a  $\pm 10\%$  tolerance.



**DRE-G**


**Round Edge wound Bracket Assembly Options Dimensions (DRE-G)**

Fully assembled on open-style brackets are available in Token (DRE-G) Edge wound Resistor series. Mill galvanized brackets complete with all hardware and stainless steel bus bars with this open-style construction consist of resistors installed.


Length Code	2		3		4		5		6		7		8		9	
Dimensions	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
<b>A</b>	228.6	9	304.8	12	381	15	457.2	18	508	20	609.6	24	685.8	27	762	30
<b>B</b>	203.2	8	579.4	11	355.6	14	431.8	17	482.6	19	584.2	23	660.4	26	736.6	29




**Round Edgewound Resistor (DRE-G)**

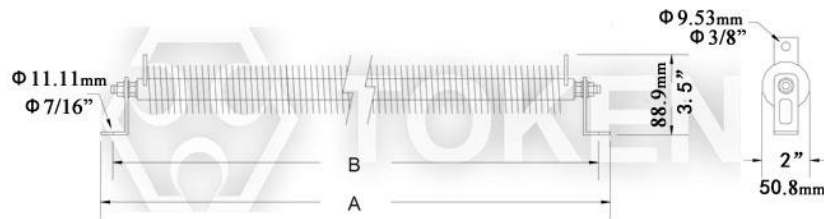

**Bracket Assembly Options Dimensions (DRE-G1)**

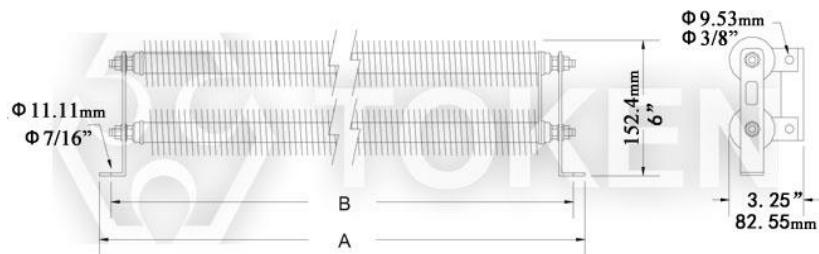

**Bracket Assembly Options Dimensions (DRE-G2)**

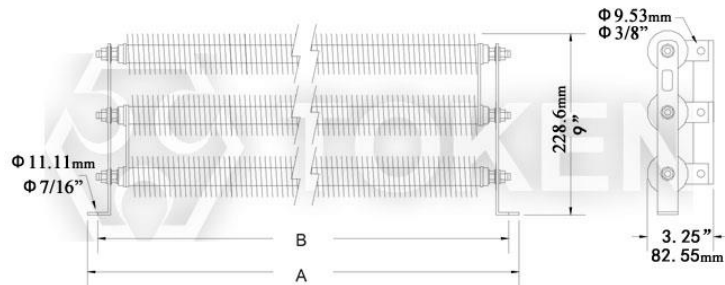

**Bracket Assembly Options Dimensions (DRE-G3)**

- Standard assemblies of 2 or more coils include series jumpers. Add "-N" to eliminate jumpers and "-P" for parallel jumpers.



**Edgewound Electrical Ratings (DRE-G)**

Length Code	2	3	4	5	6	7	8	9
<b>Amps (A)</b>	<b>Resistance (Ω) at 25°C, Resistance Tolerance (10%)</b>							
<b>11</b>	2.3	3.7	5.1	6.5	7.9	9.3	10.7	12.0
<b>12</b>	1.9	3.1	4.3	5.4	6.6	7.8	8.9	10.0
<b>18</b>	1.1	1.7	2.4	3.0	3.6	4.3	4.9	5.5
<b>21</b>	0.79	1.26	1.73	2.2	2.67	3.14	3.6	4.1
<b>24</b>	0.62	1.0	1.4	1.75	2.1	2.5	2.87	3.2
<b>27</b>	0.50	0.80	1.1	1.4	1.7	2.0	2.3	2.6
<b>29</b>	0.44	0.70	0.96	1.2	1.5	1.7	1.95	2.2
<b>35</b>	0.31	0.50	0.69	0.88	1.1	1.3	1.5	1.7
<b>40</b>	0.24	0.39	0.54	0.68	0.83	0.97	1.12	1.3
<b>45</b>	0.22	0.35	0.46	0.61	0.74	0.87	1.0	1.1
<b>50</b>	0.17	0.27	0.37	0.47	0.57	0.67	0.77	0.87
<b>60</b>	-	0.20	0.27	0.33	0.40	0.47	0.58	0.65
<b>70</b>	-	0.15	0.20	0.25	0.30	0.35	0.40	0.45
<b>85</b>	-	0.12	0.15	0.18	0.23	0.27	0.31	0.35
<b>105</b>	-	0.09	0.12	0.15	0.18	0.21	0.24	0.27

- The continuous current ratings are based on a 375°C temperature rise.
- Power: varies. •Tolerance: ± 10 %.





**DRE-R**


**Bar-Mount Edge wound Dimensions (DRE-R)**

Token (DRE-R) bar-mounted edge wounds are existing with the same electrical ratings as the Type (DRE-G) edge wounds. All units have the same approximate diameter of 2 inches (50.8mm). Units are equipped with through-bar and terminal hardware.

Length Code	2		3		4		5		6		7		8	
Dimensions	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
A	225.43	8.875	301.63	11.875	377.83	14.875	454.03	17.875	530.23	20.875	606.43	23.875	682.63	26.875
B	184.15	7.25	260.35	10.25	336.55	13.25	412.75	16.25	488.95	19.25	565.15	22.25	641.35	25.256



Bar-Mount Edgewound Resistor (DRE-R)

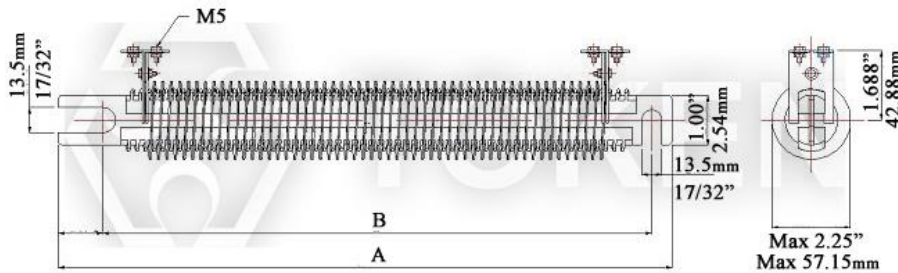

Bar-Mount Edgewound Dimensions (DRE-R)



Bar-Mount Edgewound Resistor Custom Type

### Edgewound Electrical Ratings (DRE-R)

Length Code	2	3	4	5	6	7	8
<b>Amps (A)</b>	<b>Resistance (<math>\Omega</math>) at 25°C, Resistance Tolerance (10%)</b>						
<b>5.1</b>	7.9	13.6	19.3	25.0	30.7	36.4	42.1
<b>5.9</b>	6.3	10.9	15.4	20.0	24.5	29.0	33.5
<b>6.6</b>	5.3	9.2	13.0	17.0	20.8	24.6	28.4
<b>7.6</b>	4.1	7.1	10.0	13.0	15.9	18.8	21.7
<b>8.3</b>	3.4	5.9	8.5	11.0	13.5	16.0	18.5
<b>9.4</b>	2.70	4.60	6.50	8.50	10.4	12.3	14.2
<b>10.3</b>	2.10	3.70	6.30	6.80	8.30	9.80	11.3
<b>11.8</b>	1.70	2.90	4.20	5.40	6.60	7.80	9.00
<b>12.7</b>	1.40	2.40	3.50	4.50	5.50	6.50	7.50
<b>14.6</b>	1.10	1.90	2.70	3.50	4.30	5.10	5.90
<b>16.3</b>	0.88	1.50	2.20	2.80	3.40	4.00	4.60
<b>18.4</b>	0.69	1.20	1.70	2.20	2.70	3.10	3.50
<b>26</b>	0.56	0.90	1.20	1.60	1.90	2.20	2.50
<b>29</b>	0.45	0.73	1.00	1.30	1.50	1.75	2.00
<b>33</b>	0.35	0.56	0.77	1.00	1.20	1.40	1.60
<b>39</b>	0.26	0.42	0.58	0.75	0.90	1.05	1.20
<b>41</b>	0.23	0.36	0.51	0.67	0.80	0.93	1.06
<b>43</b>	0.21	0.33	0.46	0.60	0.72	0.85	0.98
<b>47</b>	0.17	0.28	0.38	0.50	0.60	0.70	0.80
<b>50</b>	0.12	0.20	0.28	0.37	0.45	0.53	0.61
<b>54</b>	0.11	0.18	0.25	0.33	0.40	0.47	0.54
<b>57</b>	0.10	0.16	0.23	0.30	0.36	0.42	0.48
<b>63</b>	0.80	0.13	0.19	0.25	0.30	0.35	0.40
<b>68</b>	0.07	0.12	0.18	0.22	0.26	0.30	0.34
<b>75</b>	0.06	0.10	0.14	0.18	0.21	0.25	0.30
<b>78</b>	0.052	0.088	0.12	0.16	0.16	0.22	0.25
<b>89</b>	0.046	0.078	0.11	0.14	0.17	0.20	0.23
<b>91</b>	0.040	0.070	0.10	0.12	0.14	0.16	0.18
<b>100</b>	0.033	0.057	0.08	0.10	0.12	0.14	0.16

- The rating of continuous current (Amps) is based on a 375°C temperature rise.
- Power: varies. •Tolerance:  $\pm 10\%$ .






► **Electrical Characteristics**

**Electrical Characteristics (DRE)**

Test Item	Specification	Test Methods
Ambient Temperatures	Ambient Temperature: -55°C ~350°C. Derated current rating: 95% for 50°C ambient, 90% for 75°C ambient, 85% for 100°C ambient, 10% for 350°C ambient.	Standard ratings are based on maximum ambient temperatures of 40°C.
Continuous current ratings and temperatures Rise	375°C Max.	The rating of continuous current is based on a 375°C temperature rise at ambient temperatures of 40°C.
Resistance tolerance	Resistance Nominal Tolerance $\pm 10\%$ (K) for all units; as low as $\pm 3\%$ if required.	JIS-C-5202 5-1
Thermal Shock	$\Delta \leq \pm(2\%R + 0.1\Omega)$	JIS-C-5202 7.3, Room temp 30 minutes, -55°C 15 minutes.
Terminal strength	$\Delta \leq \pm(2\%R + 0.1\Omega)$	JIS-C-5202 6.1, 45N, 30S
Short-term Overload	$\Delta \leq \pm(2\%R + 0.1\Omega)$	JIS-C-5202 5.5, 10PR, 5S.

- Resistance and resistance tolerance were tested in-house at room temperature (25°C) with micro resistance meter.
- Ambient Temperature: refers to the temperature inside the subject and around the specimen, not to the air-temperature outside the subject.

**Edge wound Derating Curve (DRE)**

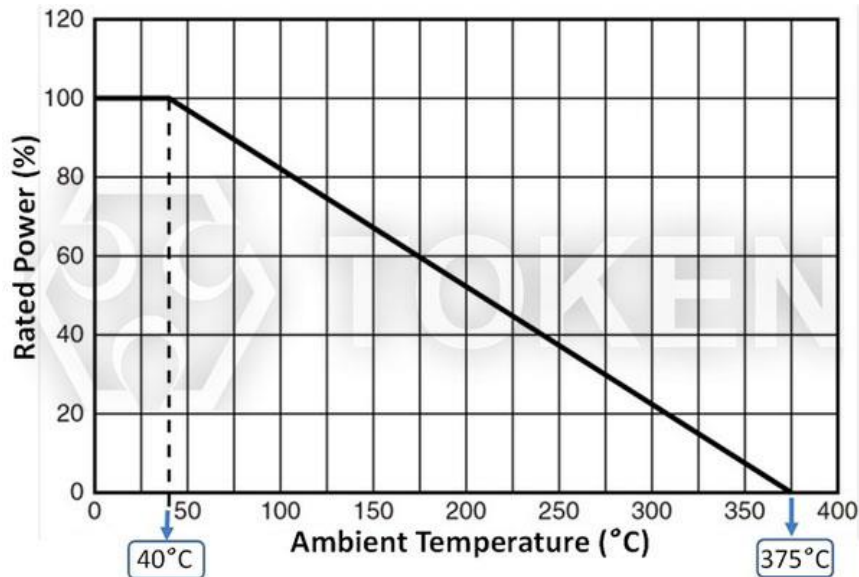

Edge wound Derating Curve (DRE)



**Order Codes**

**Order Codes (DRE)**

DRE	2	11	2R3		K		G		
Part Number	Length Code	Amps (A)	Resistance Value		Resistance Tolerance (%)		Mounting Options		
DRE	2	11	2R3	2.3Ω	K	±10%	P	Standard	
	3	12		R62			0.62Ω	R	Bar-Mount
	4	18		R37			0.37Ω	G1	Standard Bracket
	5	21					G2	Bracket (Series Jumper included for 2 or more Standard Assembly)	
	6	24					G3	Bracket (Series Jumper included for 2 or more Standard Assembly)	
	7	27					G2P	Parallel Jumper (2 or more Assembly)	
	8	29					G3P	Parallel Jumper (2 or more Assembly)	
	9	35					G2N	No Jumper (2 or more Assembly)	
		...					G3N	No Jumper (2 or more Assembly)	

## ► General Information

### Benefits & Features

Providing design engineers with an economical resistor with high quality performance, Token Electronics offers industry grade power wire wound devices.

Token provide terminal blocks, thermal switches, fusing, fans, junction boxes, screened or solid bottom plates, conduit knockouts, and customer specified requirements. For large applications a welded frame construction is utilized to provide a robust design for power resistor mounting in both indoor and outdoor environments.

Products range from large capacity metal clad, nonflammable fixed and adjustable, wave ribbon wire-wound, slide, starter, box type, to nonflammable flat type. Token extends a complete line for both military and commercial applications.

### Utilization Notes

1. Smoke emitted from non-flammable resistors on initial use in powered circuits is a normal phenomenon and the component can be safely utilized.
2. All resistors manufactured by Token Electronics Industry Corporation comply with the U.S. UL-94 non- flammability test, Class V-0, a continuous combustion period of zero seconds.
3. Never use organic solvents to clean non-flammable resistors.
4. Non-flammable resistors cannot be utilized in oil.
5. Non-flammable resistors cannot be used in high frequency machinery because of the inductance produced by the windings. A suitable type of resistor must be selected. Contact us for details.
6. In applications where resistors are subject to intermittent current surges and spikes, be sure in advance that the components selected are capable of withstanding brief durations of increased load.
7. Do not exceed the recommended usable load. Resistors must use within the rated voltage range to prevent the shortening of service life and/or failure of the wound resistance elements.
8. Minimum load. Resistors must be utilized at 1/10 or more of the rated voltage to prevent poor conductance due to oxidation build-up.
9. Although the hardness exceeds that of a 3H pencil lead, do not nick the resistor coating with screw drivers or other pointed objects.
10. Avoid touching non-flammable resistors in operation; the surface temperature ranges from approximately 350°C ~ 400°C when utilized at the full rated value. Maintaining a surface temperature of 200°C or less will extend resistor service life.
11. Keep temperature from rising by choosing a resistor with a higher rated capacity; do not use a component having the exact load value required. For considerations of safety in extended period applications, the resistor rating should be more than four times higher than the actual wattage involved, but never use a resistor at less than 25% of its rated power.
12. Application and Placement: Wire-wound resistors use different gauges of wire as resistance elements. Sometimes the gauge is extremely thin (finer than a strand of human hair) and very susceptible to breakage in environments containing salts, ash, dust and corrosives. Avoid utilization in such environments. Do not install in dusty areas because the accumulation will cause shorts and poor conductance.

