

Version:
January 12, 2017



(RDM)
Low Noise Carbon
MELF Resistors

Token Electronics Industry Co., Ltd.

Taiwan: No.137, Sec. 1, Zhongxing Rd., Wugu District,
New Taipei City, Taiwan, R.O.C. 24872
Tel: +886 2981 0109 **Fax:** +886 2988 7487

China: 12F, Zhong Xing Industry Bld., Chuang Ye Road,
Nan Shan District, Shen Zhen City,
Guang Dong, China 518054
Tel: +86 755 26055363; **Fax:** +86 755 26055365

[Web: www.token.com.tw](http://www.token.com.tw)

[Email: rfq@token.com.tw](mailto:rfq@token.com.tw)



► Product Introduction

Token Carbon Film MELF (RDM) is the cost-effective option.

Features :

- Coating color: Yellow; Marking: Color code (3 color band).
- Free direction for mounting due to cylindrical design. Electrodes strength is higher than flat chip resistors.
- Specially plated electrodes for high solderability. Lower current noise than flat chip resistors. Lead (Pb)-free and RoHS compliant.
- Speciality carbon film technology. DIN: 0204, 0207, 0309.

Applications :

- Home appliances,
- Electrical Equipment,
- Consumer electronics.

Commercial grade low power carbon film resistors offer high quality performance for applications that do not require surge protection or precision tolerances.

Providing design engineers with an economical power resistor with high quality performance, Token Electronics now offers commercial grade low power carbon film resistors. Designated the RDM Series, the conformal coated resistors offer high quality performance for applications that do not require surge protection or precision tolerances.



The commercial grade carbon Melf resistors are available in flame retardant packaging and have ideal specifications for consumer electronic or electrical devices. The RDM Series resistors offer a wide resistance range for devices with power ratings below 1W, delivering high quality performance for general purpose applications.

The RDM Series resistors are ideal for general use applications including electrical equipment, small appliances and consumer electronics, such as televisions and other high-volume products.


The RDM Series film resistors feature power ratings from 0.125 to 1W, with a resistance range from 1 Ω to 1M Ω . Standard tolerances for the devices are to $\pm 2\%$ and $\pm 5\%$ with TCRs as low as $\pm 300\text{ppm}/^\circ\text{C}$ for values of 1K Ω or less. Maximum working voltage ranges from 200V to 350V.

Contact our sales representative with your specific needs. Or you can link to Token official website "[Melf Resistors](http://www.token.com.tw)" for more information.

► **Dimensions**

Dimensions (Unit: mm) Carbon Film (RDM)

Type	RDM73S	RDM73P	RDM74S	RDM74P	RDM16M	RDM17S	RDM17P	
DIN-44061 type	0204	0204	0207	0207	0207	0309	0309	
Dimensions (Unit: mm)	L	3.5±0.2	3.5±0.2	5.9±0.2	5.9±0.2	5.9±0.2	8.5±0.2	8.5±0.2
	C (Min.)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	D1	1.40±0.15	1.40±0.15	2.2±0.1	2.2±0.1	2.2±0.1	3.2±0.2	3.2±0.2
	D2 (Max.)	1.55	1.55	2.4	2.4	2.4	3.4	3.4
	D3 (Max.)	1.25	1.25	2.1	2.1	2.1	3.0	3.0

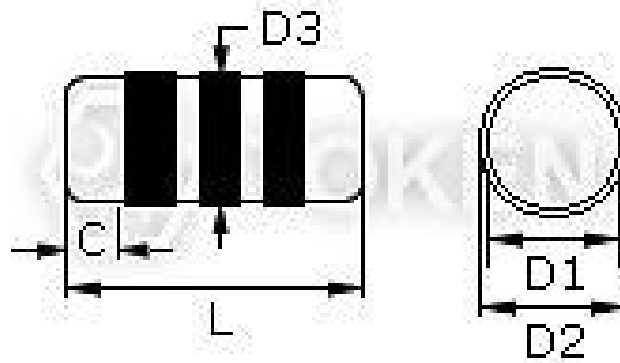

Carbon Film Low Noise MELF (RDM) Dimensions

► Characteristics

Characteristics Lower Current Noise (RDM)

Type	RDM73S	RDM73P	RDM74S	RDM74P	RDM16M	RDM17S	RDM17P	
DIN-44061 type	0204	0204	0207	0207	0207	0309	0309	
Power Rating (W)	1/8	1/4	1/4	1/2	1	1/2	1	
Resistance Range (Ω) E24	1 ~ 1M							
Resistance Tolerance	G: ±2% J: ±5%							
Max. Working Voltage (V)	200	250	300	300	350	350	350	
Max. Overload Voltage (V)	400	500	600	600	700	700	700	
Packaging & Qty (pcs)	Case	180K	180K	96K	96K	96K	50K	50K
	Reel	3K	3K	2K	2K	2K	2.5K	2.5K

Item	Characteristics					Test Method
Temp. Coefficient (PPM/°C)	TCR Type	0 ~ -350	0 ~ -600	0 ~ -1000	0 ~ -1500	JIS-C(5202-5.2)
	>1/4W	<10K	11K~115K	160K~2M2	-	
	1/8W	<1K	1K1~47K	51K~470K	510K~1M	
Short Time Overload	± (1.0% + 0.05Ω)					JIS-C(5202-5.5)
Intermittent	± (1.0% + 0.05Ω)					JIS-C(5202-5.8)
Resistance to Soldering	± (1.0% + 0.05Ω)					JIS-C(5202-6.4)
Solderability	95% Coverage min					JIS-C(5202-6.5)
Moisture Resistance	± (5.0% + 0.1Ω)					JIS-C(5202-7.9)
Load Life	± (3.0% + 0.1Ω)					JIS-C(5202-7.10)

► Order Codes

Order Codes Carbon MELF (RDM)

RDM74P	1R		J		TR	
Part Number	Resistance Value (Ω)		Resistance Tolerance (%)		Package	
RDM73S	1R2	1.2Ω	G	±2%	P	Bulk
RDM73P	12R	12Ω	J	±5%	TR	Taping Reel
RDM74S	120R	120Ω				
RDM74P	12K	12KΩ				
RDM16M						
RDM17S						
RDM17P						

► General Information

Token MELF Offers Designer a Greater Choice

Token Electronics is now offering the complete range of MELF products, comprising DIN-0411, DIN-0309, DIN-0207, DIN-0204 and DIN-0102. This high stability, close-tolerance MELF resistors have a footprint very close to comparable chip resistors but maintain their tolerance and deliver higher stability over a wider temperature range.

Where applications require even tighter tolerance, Token offer Ultra Precision range in the RJM package, with values from $0.1\Omega \sim 22M\Omega$, tolerance from $\pm 5\%$ down to as low as $\pm 0.05\%$ and TC from $\pm 50\text{ppm}/^\circ\text{C}$ to $\pm 5\text{ppm}/^\circ\text{C}$.

For high pulse load and high-frequency applications, Token Electronics offer specialized MELF resistor. The high pulse load resistors are metal glaze film RGM, available in values from $50K\Omega \sim 22M\Omega$ and $\pm 0.5\%$ precision tolerance, for $0.125\text{ W} \sim 3\text{ W}$ applications.

High-frequency RFM resistors are available for RF microwave applications where impedance change due to the parasitic inductance of regular resistors is not acceptable.

Chip Resistor Alternatives

In very low resistance values, between 0.1Ω and 475Ω , not usually offered by conventional chip resistors, these are available in RJM72P 0102, RJM73P 0204, RJM74P 0207 and standard RJM18M 0411 MELF precision packages.

All MELF-type resistors are available on blister tape for automated placement and maintain their high stability, high precision characteristics when exposed to soldering temperatures and operating stresses including moisture, vibration, humidity and temperature variation within the specified range.

This makes them suitable for a wide range of applications, from laboratory and prototyping work to installation in hostile environments such as airframe or under-bonnet areas, exposed parts of vehicles, or other places where electronic sensing and controls must be installed.