


Version:  
January 12, 2017

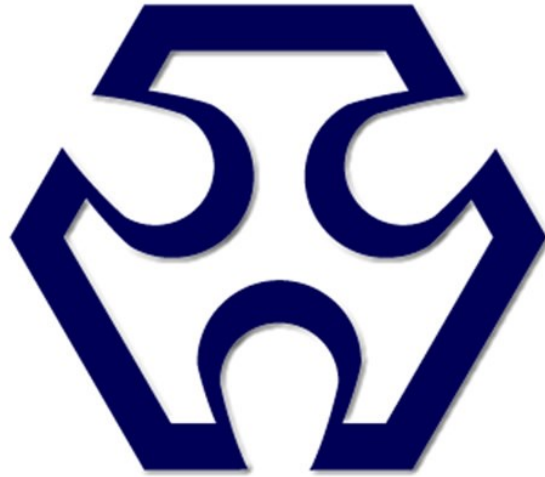

# TOKEN

## (LRB)

# Low Ohmic Open Air Resistor

**Token Electronics Industry Co., Ltd.**

**Taiwan:** No.137, Sec. 1, Zhongxing Rd., Wugu District,  
New Taipei City, Taiwan, R.O.C. 24872  
Tel: +886 2981 0109 Fax: +886 2988 7487

**China:** 12F, Zhong Xing Industry Bld., Chuang Ye Road,  
Nan Shan District, Shen Zhen City,  
Guang Dong, China 518054  
Tel: +86 755 26055363; Fax: +86 755 26055365

[Web: www.token.com.tw](http://www.token.com.tw)

[Email: rfq@token.com.tw](mailto:rfq@token.com.tw)



## ▶ Product Introduction

**Token's open-air, low inductance, low ohmic resistor is alternative current shunts.**

### Features :

- Low inductance.
- High stability open-air style.
- Precision alloys resistive element.
- Lead (Pb)-free and RoHS compliant.
- Standard tolerance  $\pm 3\%$ ,  $\pm 5\%$ ,  $\pm 10\%$ .
- Radial leads, low resistance value  $2\text{ m}\Omega \sim 50\text{ m}\Omega$ .

### Applications :

- CPU Drive Control.
- Automotive, Feedback System.
- Residual Battery Power Detection, and Current Sensing.
- Power Supply Shunt, Current Detective.
- Inverter and Switching Power Supplies.
- Power Tool Motor controls.

Developed for current sensing and shunt applications, Token's LRB series of bare element resistors have a precision alloys (Ni-Cu) element welded construction. Built-in stand-offs and standard spacing makes for easy mounting.

The bare metal element design allows for maximum cooling via airflow, forcing less heat into the PCB. The flameproof construction offers values down to  $2\text{m}\Omega$  with low inductance. Customer can specify resistance range designed to satisfy challenging and specific technical requirements.




These factors make the LRB Series an outstanding choice for all types of high current power supplies and power applications requiring a robust part that is impervious to most environmental stresses. The device is ideal for current limited, current balance, and sampling sense in power supplier. It takes on the capability of high overload, and the function easily welding and non-inductance as well.

The Open Air (LRB) Low Ohmic Value Resistor is available in bulk packaging and is RoHS compliant and lead free. For non-standard technical requirements and special applications, please contact us with your specific needs, or link to Token official website "[Current Sensing Resistors](#)" for more information.

## LRB Dimensions

### Dimensions (Unit: mm) (LRB)

RM (mm)	H Max. (mm)	B Max. (mm)	Ø (mm)	L1 (mm)
5 ~ 50	20	1	5 ~ 29	3±0.5

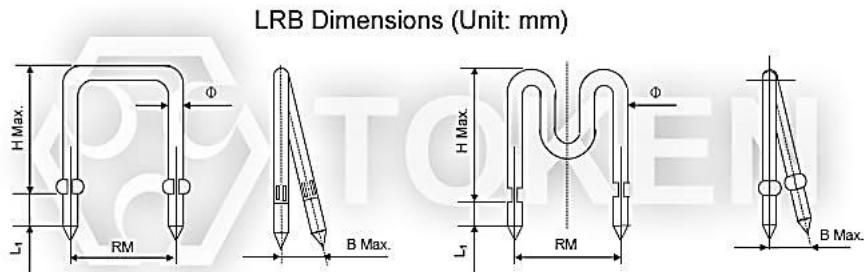

Current Sensing Open Air Resistors (LRB) Dimensions

## Specification

### Specification (LRB)

Type	Diameter Ø (mm)	Rated Current (A)	Resistance Range (mΩ)	Tolerance (%)	Temperature Coefficient (ppm/°C)	Temperature Range (°C)
LRB-05	0.5	2.5	20~50	±3%(H) ±5%(J) ±10%(K)	±50 ~ ±100	-55 ~ +85
LRB-06	0.6	3.0	20~50			
LRB-07	0.7	4.0	20~50			
LRB-08	0.8	4.5	20~50			
LRB-09	0.9	5.0	10~50			
LRB-10	1.0	5.5	10~30			
LRB-11	1.1	6.0	5~20			
LRB-12	1.2	7.0	5~20			
LRB-13	1.3	7.5	5~20			
LRB-14	1.4	8.0	5~20			
LRB-15	1.5	9.0	5~20			
LRB-16	1.6	9.5	5~15			
LRB-18	1.8	11	3~10			
LRB-20	2.0	12	2~8			
LRB-23	2.3	14	2~8			
LRB-25	2.5	17	2~5			
LRB-29	2.9	21	2~5			

## Order Codes

### Order Codes (LRB)

LRB	-	08	05	R005	K	P
Part Number		Diameter Ø	Leads Pitch RM (mm)	Resistance Value (Ω)	Tolerance %	Package-Code
LRB		05   0.5 mm	05   5 mm	R005   0.005Ω	H   ±3%	P   Bulk
		06   0.6 mm	10   10 mm	R02   0.02Ω	J   ±5%	
		07   0.7 mm	15   15 mm	R05   0.05Ω	K   ±10%	
		08   0.8 mm	20   20 mm			
		09   0.9 mm	25   25 mm			
		10   1.0 mm	30   30 mm			
		11   1.1 mm	35   35 mm			
		12   1.2 mm	40   40 mm			
		13   1.3 mm	45   45 mm			
		14   1.4 mm	50   50 mm			
		15   1.5 mm				
		16   1.6 mm				
		17   1.7 mm				
		18   1.8 mm				
		20   2.0 mm				
		23   2.3 mm				
		25   2.5 mm				
		29   2.9 mm				

## ► General Information

### Your Current Options - Token Current Sense

As the world becomes more and more technology-driven, the uses for current sensing components will continue to increase. The need for even lower resistance value ranges is already becoming evident, as is the need for these resistors to handle more power. The industry-wide trend is the emergence of smaller and smaller products.

Token Electronics offers a wide variety of current sensing products from the industry to military standards, such as current sense in Thin-Film / Thick-Film Technology, Bare Element Resistors, and Open Air Shunts. This enables Token to present an astounding number of possible solutions for any circuit design needs.

### Applications of Current Detecting Components

Token's TCS and CS Series unique form factor provides automotive designers with several advantages. Both TCS and CS Series are ideal for applications involving window lift motors, fuel pump systems, seat belt pretensioners, and pulse width modulator feedback.

The wider resistive element and lower resistance enables higher current to pass through the device. Token's LRC ultra low Ohmic metal strip chip series provides the inherent ability to flex slightly and offers stress relief during extreme temperature cycling on typical or metal substrates. This LRC series is suitable for switch power supply applications (DC-DC Converter, Charger, and Adaptor) and power management of monitor.

The open air design of bare element resistor LRA and LRB Series provide a far cooler operation by allowing more air flow under the resistive element to keep excess heat from being transmitted to the PC board. They are suitable for high power AC/DC detection of power supply circuit.

Token axial moulded BWL series provides power rating up to 10 watts and lower resistance  $0.005\Omega$ , is ideal for all types of current sensing applications including switching and linear power supplies, instruments and power amplifiers.

Token standard current sensing components can be replacement for Vishay, IRC, Ohmite, KOA, Yageo devices with fast delivery and more competitive price. Contact us with your specific needs.

