Version: June 27, 2017



Web: www.token.com.tw

Email: rfg@token.com.tw

### **Token Electronics Industry Co., Ltd.**

Taiwan: No.137, Sec. 1, Zhongxing Rd., Wugu District, New Taipei City, Taiwan, R.O.C. 24872 Tel: +886 2981 0109 Fax: +886 2988 7487

China: 12F, Zhong Xing Industry Bld., Chuang Ye Road, Nan Shan District, Shen Zhen City, Guang Dong, China 518054 Tel: +86 755 26055363; Fax: +86 755 26055365



## Product Introduction

### **Introduction (TCUU)**

#### Features :

- Easily inserted into PCB.
- Small size and inexpensive type.
- Highly reliable, compact & lightweight.
- Magnetic shielded construction available.
- AC common mode choke coil which has excellent attenuation.
- Characteristics in Low Frequency Band.

#### **Applications :**

- Multi-Function Telephones.
- Common Mode Chokes for Effective AC line Noise Prevention.
- AC Adapters, Faxs Small Size Fluorescent Lights, VCRS,Color TVS.

EMI Line Filters for filtering common mode power line noise. In recent times there has been a

growing need for energy storage inductors for noise filtering in both mains line filters and DC chokes used in switched-mode power supplies. In mains line filter applications the filtering falls into two categories: common-mode noise and differential-mode noise.



The line filter arrangement consists of two sections bobbin between the mains supply and the equipment. Note that the common-mode filter is

wound on a single core and the differential mode filter consists of two individual wound cores. The common-mode noise is in relation to ground and is common to both lines. Differential mode noise is the noise between the two lines. Both types of noise are usually present to varying degrees.

Token EMI line filters (TCUU) series common mode choke coils are used in a wide range of prevention of radio frequency interference (RFI) and electromagnetic interference (EMI) from power supply lines and for prevention of multifunctioning of products such as measuring equipment and system equipment. Features wide range of selection, high impedance at applicable frequency, and high self-resonant frequency.

The (TCUU) series is designed to reduce stray capacity between windings by using a single-layer coil and two sections bobbin construction on high permeability ferrite core, which offer excellent high frequency characteristics. This series provides excellent noise suppression for high frequency ranges including the FM band. This filter can also be used as a signal line with excellent withstanding voltage, since the windings are divided into two sections.


Token is equipped to design and produce custom components to meet many design and reliability demands. Custom parts are available on request. Token will also produce devices outside these specifications to meet specific customer requirements, contact us with your specific needs. For more information, please link to Token official website "<u>Through Hole Inductors</u>".





# TCUU98V

#### Configurations & Dimensions (Unit: mm) (TCUU98V)

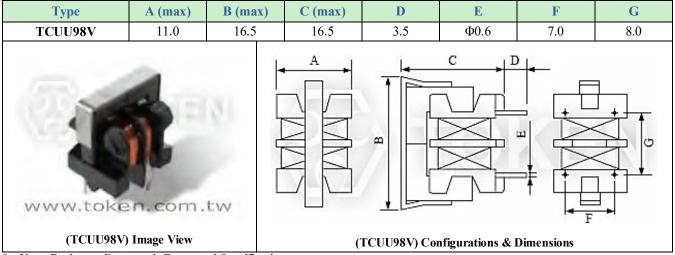

• Note: Design as Customer's Requested Specifications.

## Electrical Characteristics (TCUU98V) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH max)	DCR (Ω)(max)	IDC (A)(max)
TCUU98V-471	0.47	25	0.15	1.00
TCUU98V-681	0.68	25	0.25	0.85
TCUU98V-102	1.0	50	0.35	0.70
TCUU98V-222	2.2	50	0.7	0.50
TCUU98V-392	3.9	100	1.20	0.38
TCUU98V-472	4.7	100	1.60	0.34
TCUU98V-682	6.8	150	2.50	0.25
TCUU98V-103	10.0	200	4.00	0.20

Note:


• Test Freq.: 1.0kHz





## TCUU98H

#### Configurations & Dimensions (Unit: mm) (TCUU98H)

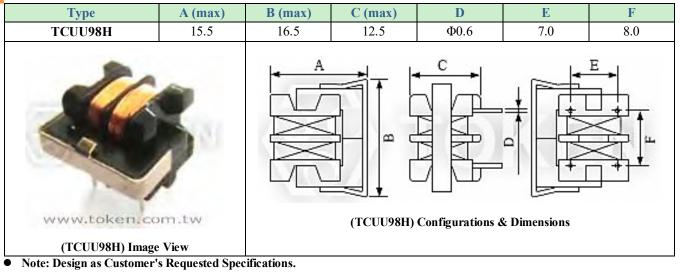

## Electrical Characteristics (TCUU98H) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH)(max)	DCR (Ω)(max)	IDC (A)(max)
TCUU98H-471	0.47	25	0.15	1.00
TCUU98H-681	0.68	25	0.25	0.85
TCUU98H-102	1.0	50	0.35	0.70
ТСИИ98Н-222	2.2	50	0.7	0.50
TCUU98H-392	3.9	100	1.20	0.38
TCUU98H-472	4.7	100	1.60	0.34
TCUU98H-682	6.8	150	2.50	0.25
TCUU98H-103	10.0	200	4.00	0.20

Note:


• Test Freq.: 1.0kHz





# TCUU10

#### Configurations & Dimensions (Unit: mm) (TCUU10)

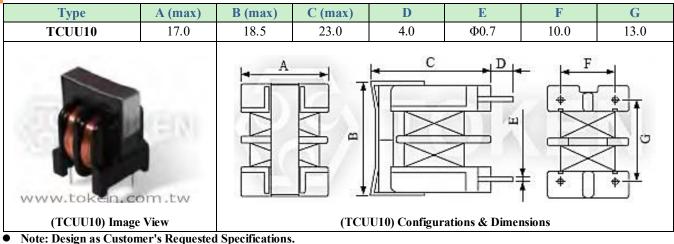

### Electrical Characteristics (TCUU10) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH)(max)	DCR (Ω)(max)	IDC (A)(max)
TCUU10-332	3.3	100	0.71	0.65
TCUU10-682	6.8	200	1.26	0.435
TCUU10-123	12.0	360	2.20	0.34
TCUU10-223	22.0	440	3.64	0.25
TCUU10-333	33.0	660	5.74	0.20
TCUU10-513	51.0	1000	9.12	0.15

Note:


• Test Freq.: 1.0kHz





# TCUU16

#### **Configurations & Dimensions (Unit: mm) (TCUU16)**

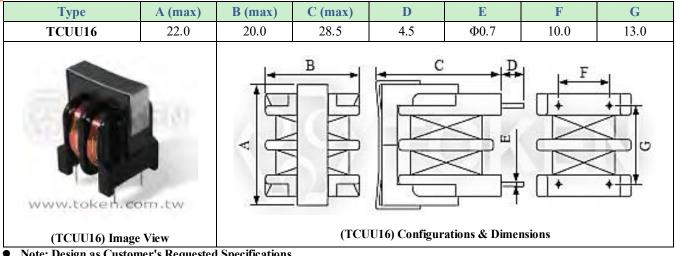

Note: Design as Customer's Requested Specifications.

### Electrical Characteristics (TCUU16) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH)(max)	DCR (Ω)(max)	IDC (A)(max)
TCUU16-152	1.5	40	0.125	1.90
TCUU16-402	4.0	60	0.27	1.20
TCUU16-802	8.0	80	0.46	0.90
TCUU16-203	20.0	150	1.60	0.50
TCUU16-303	30.0	200	2.50	0.40

Note:


Test Freq.: 1.0kHz





# TCUT20

#### **Configurations & Dimensions (Unit: mm) (TCUT20)**

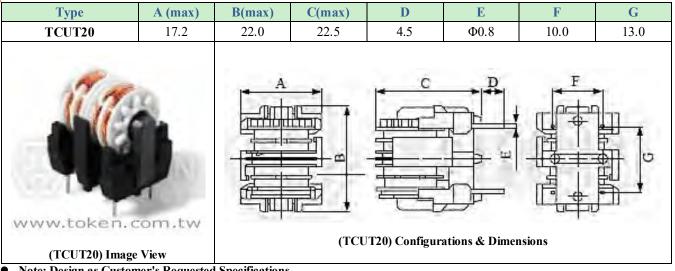

Note: Design as Customer's Requested Specifications.

## Electrical Characteristics (TCUT20) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH)(max)	DCR (Ω)(max)	IDC (A)(max)
TCUT20-222	2.2	150	0.24	1.30
TCUT20-392	3.9	150	0.41	1.00
TCUT20-103	10.0	550	1.00	0.60
TCUT20-183	18.0	600	1.63	0.50
TCUT20-223	22.0	800	2.04	0.40
TCUT20-333	33.0	800	3.42	0.30

Note:


Test Freq.: 1.0kHz





# TCET24B

#### Configurations & Dimensions (Unit: mm) (TCET24B)

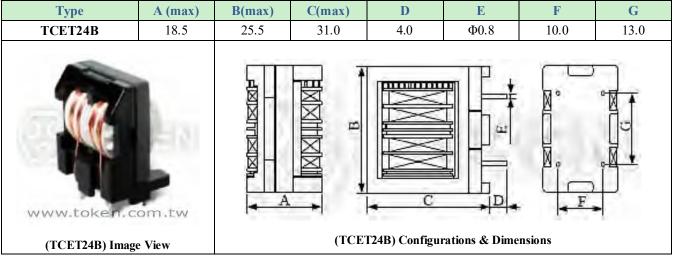

• Note: Design as Customer's Requested Specifications.

### Electrical Characteristics (TCET24B) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH)(max)	DCR (Ω)(max)	IDC (A)(max)
TCET24B-252	2.5	100	0.13	2.00
TCET24B-352	3.5	150	0.18	1.70
TCET24B-452	4.5	200	0.21	1.50
TCET24B-103	10.0	300	0.47	1.00
TCET24B-153	15.0	400	0.73	0.80
TCET24B-203	20.0	600	0.87	0.70
TCET24B-353	35.0	800	1.58	0.60

Note:


• Test Freq.: 1.0kHz





# ТСЕТ24Н

#### Configurations & Dimensions (Unit: mm) (TCET24H)

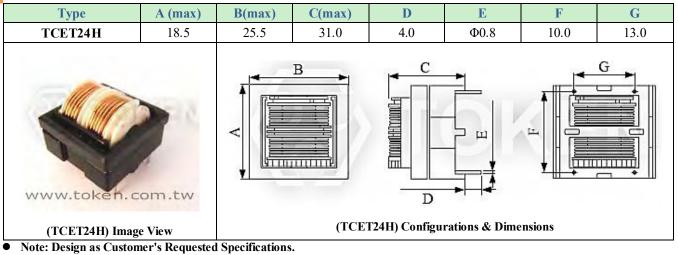

### Electrical Characteristics (TCET24H) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH)(max)	DCR (Ω)(max)	IDC (A)(max)
ТСЕТ24Н-252	2.5	100	0.13	2.00
ТСЕТ24Н-352	3.5	150	0.18	1.70
ТСЕТ24Н-452	4.5	200	0.21	1.50
ТСЕТ24Н-103	10.0	300	0.47	1.00
ТСЕТ24Н-153	15.0	400	0.73	0.80
ТСЕТ24Н-203	20.0	600	0.87	0.70
ТСЕТ24Н-353	35.0	800	1.58	0.60

Note:


• Test Freq.: 1.0kHz





# TCET28B

#### Configurations & Dimensions (Unit: mm) (TCET28B)

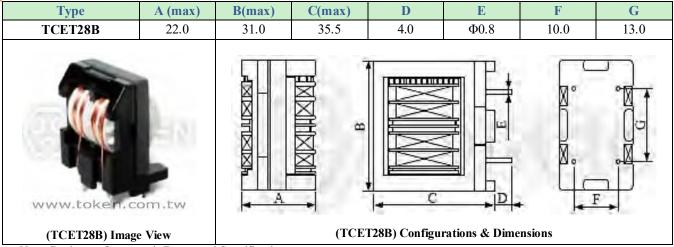

• Note: Design as Customer's Requested Specifications.

### Electrical Characteristics (TCET28B) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH)(max)	DCR (Ω)(max)	IDC (A)(max)
TCET28B-182	1.8	100	0.072	2.60
TCET28B-682	6.8	200	0.23	1.60
TCET28B-123	12.0	400	0.38	1.20
TCET28B-223	22.0	500	0.65	1.00
TCET28B-393	39.0	700	1.43	0.70
TCET28B-683	68.0	850	1.82	0.60

Note:


• Test Freq.: 1.0kHz





## TCET28H

#### Configurations & Dimensions (Unit: mm) (TCET28H)

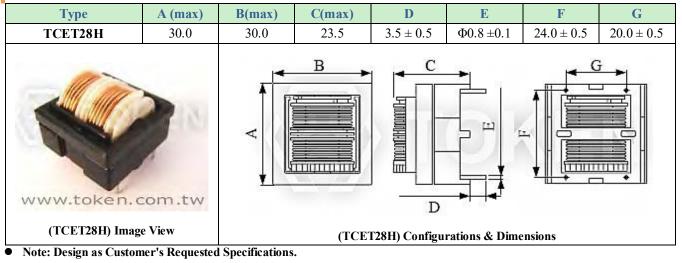

### Electrical Characteristics (TCET28H) at 25°C

Part Number	Inductance (mH)(min)	Inductance Balance (µH)(max)	DCR (Ω)(max)	IDC (A)(max)
TCET28H-182	1.8	100	0.072	2.60
TCET28H-682	6.8	200	0.23	1.60
ТСЕТ28Н-123	12.0	400	0.38	1.20
ТСЕТ28Н-223	22.0	500	0.65	1.00
ТСЕТ28Н-393	39.0	700	1.43	0.70
TCET28H-683	68.0	850	1.82	0.60

Note:

• Test Freq.: 1.0kHz







## Order Codes

## Order Codes (TCUU98V, TCUU98H, TCUU10, TCUU16)

TCUU98V	471					Р
Part Number	Inductance		Winding		Package	
TCUU98V Vertical Type	471	0.47mH	None	Standard Winding	Р	Bulk
TCUU98H Horizontal Type	681	0.68mH	D	Sectional Winding		
TCUU10	102	1.0mH			l	
TCUU16	222	2.2mH				

## (TCUT20, TCET24B, TCET24H, TCET28B, TCET28H) Order Codes

TCUT20		222	Р		
Part Number		Inductance		Package	
TCUT20	222	2.2mH	Р	Bulk	
TCET24B	392	3.9mH			
TCET24H	103	10.0mH			
TCET28B	183	20.0mH			
TCET28H					





## **General Information**

### Leading-Edge Technology

Token Electronics brand passive component specializes in standard and custom solutions offering the latest in state-of-the-art low profile high power density inductor components. Token provides cost-effective, comprehensive solutions that meet the evolving needs of technology-driven markets. In working closely with the industry leaders in chipset and core development, we remain at the forefront of innovation and new technology to deliver the optimal mix of packaging, high efficiency and unbeatable reliability. Our designs utilize high frequency, low core loss materials, new and custom core shapes in combination with innovative construction and packaging to provide designers with the highest performance parts available on the market.

#### **Find Inductor Solutions Faster**

#### Find Your Inductor - wt.moc.nekot@qfr

Only timely and accurate information can help manage the changing needs of your customers. The Token Inductor Finder puts you only a click away from all of the inductor information you need.

#### Find Your Solution - wt.moc.nekot@qfr

Selecting the correct inductor solution will not only save you time, but it will give you a competitive edge. At Token, we are committed to helping you find the most efficient alternative for your power design. Our inductor and power supply design experts can help you make that selection.

Please forward us:

- A brief description of your particular application's requirements.
- Details of an existing solution that you'd like to replace, enhance or find an alternative.
- Inquiries for feasibility to tailor a power transformer or inductor to your specific application.

We can also help you with any additional technical information you might need relating to any of our products.

#### Ask Us Today



