

Version:  
January 31, 2018



**(CF)**  
**Carbon Film**  
**Resistors**

**Token Electronics Industry Co., Ltd.**

**Taiwan:** No.137, Sec. 1, Zhongxing Rd., Wugu District,  
New Taipei City, Taiwan, R.O.C. 24872  
Tel: +886 2981 0109 Fax: +886 2988 7487

**China:** 12F, Zhong Xing Industry Bld., Chuang Ye Road,  
Nan Shan District, Shen Zhen City,  
Guang Dong, China 518054  
Tel: +86 755 26055363; Fax: +86 755 26055365

[Web: www.token.com.tw](http://www.token.com.tw)

[Email: rfq@token.com.tw](mailto:rfq@token.com.tw)



**▶ Product Introduction****||| Pulse load carbon film resistor is the cost-effective option.****Features :**

- Tolerances: G ( $\pm 2\%$ ), J ( $\pm 5\%$ )
- Power wattages up to 5W at  $+25^{\circ}\text{C}$
- Lead (Pb)-free and RoHS compliant
- Operating temperature range:  $-55^{\circ}\text{C} \sim +155^{\circ}\text{C}$
- Axial leaded type, high power at small sizes

**Applications :**

- Consumer Electronic
- Telecommunications
- Household Appliances
- Automotive, Computer, Instrumentation

Providing design engineers with an economical power resistor with high quality performance, Token Electronics now offers commercial grade low power carbon film resistors.

Designated the CF series, the resistors are available in both standard CF and miniature CFS sizes, the conformal coated resistors offer high quality performance for applications that do not require surge protection or precision tolerances.

The commercial grade carbon CF series is available in flame retardant packaging and have ideal specifications for consumer electronic or electrical devices. The CF devices offer a wide resistance range for devices with power ratings up to 3W in standard CF size, and 5W in miniature CFS sizes, delivering high quality performance for general purpose applications.

The CF series resistors are ideal for general use applications including electrical equipment, small appliances and consumer electronics, such as televisions and other high-volume products. The CF series feature standard tolerances is G ( $\pm 2\%$ ) and J ( $\pm 5\%$ ), with a resistance range from  $0.5\Omega$  to  $22\text{M}\Omega$ .


All CF series devices are RoHS-compliant, and compatible with high temperature soldering processes normally employed for lead free solders. Also, CF resistors are available in various forming styles and different leads for different applications. Contact us with your specific needs. For more information, please link to Token official website "[General Purpose Resistors](#)".



## ► Dimensions & Specifications

### Dimensions & Specifications (Unit: mm) (CF)

| Type  |       | Dimension (mm) |         |      |           | Maximum Working Voltage | Maximum Overload Voltage | Resistance Tolerance |          |
|-------|-------|----------------|---------|------|-----------|-------------------------|--------------------------|----------------------|----------|
| CF    | CFS   | L              | D       | H    | d±0.05    |                         |                          | ± 2%(G)              | ± 5%(J)  |
| 1/8 W | .     | 3.2±0.2        | 1.5±0.2 | 26±1 | 0.40~0.45 | 200                     | 400                      | 10Ω-470K             | 1Ω-4.7M  |
| 1/6 W | 1/4 W | 3.2±0.2        | 1.5±0.2 | 26±1 | 0.40~0.45 | 200                     | 400                      | 1Ω-10M               | 0.5Ω-22M |
| 1/4 W | 1/2 W | 6.2±0.5        | 2.3±0.3 | 26±1 | 0.40~0.50 | 250                     | 500                      | 1Ω-10M               | 0.5Ω-22M |
| 1/3 W | 1/2 W | 8.5±0.5        | 2.8±0.3 | 26±1 | 0.50~0.55 | 250                     | 500                      | 1Ω-10M               | 0.5Ω-22M |
| 1/2 W | 1 W   | 9.0±0.5        | 3.0±0.5 | 26±1 | 0.50~0.55 | 350                     | 700                      | 1Ω-10M               | 0.5Ω-22M |
| 1 W   | 2 W   | 11±1.0         | 4.0±0.5 | 35±3 | 0.75~0.80 | 500                     | 1000                     | 1Ω-10M               | 0.5Ω-22M |
| 2 W   | 3 W   | 15±1.0         | 5.0±0.5 | 35±3 | 0.75~0.80 | 500                     | 1000                     | 1Ω-10M               | 0.5Ω-22M |
| 3 W   | 5 W   | 17±1.0         | 6.0±0.5 | 35±3 | 0.75~0.80 | 500                     | 1000                     | 1Ω-10M               | 0.5Ω-22M |

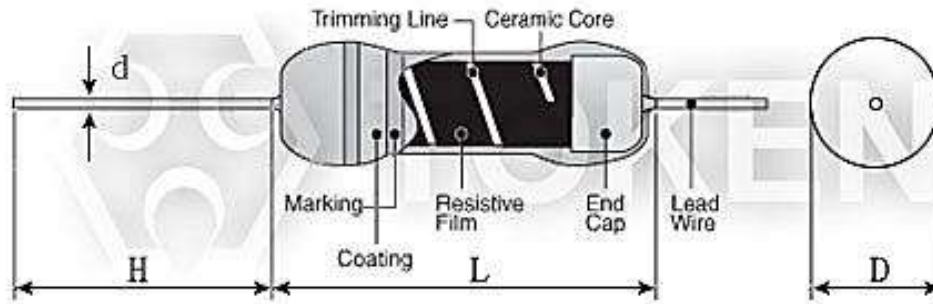

Carbon Film (CF) Dimensions (Unit: mm)

## Electrical Performance

### Electrical Performance (CF)

| Test Items                         | Condition  | Spec  |
|------------------------------------|--|---|
| Operating Temp.range               | -55°C ~ +155°C   |   |
| Short Time Over Load               | 2.5 Times of rated voltage for 5sec.                           | ± 1%  |
| Load Life                          | 70°C on-off cycle 1,000hrs.                                    | ± 5%  |
| Moisture-Proof Load Life           | 40°C 95% RH on-off cycle 1,000hrs                              | ± 5%  |
| Soldering After Resistance         | 350°C for 3sec.  | ± 0.5%  |
| Temperature Cycle                  | -30°C~85°C 5cycles   | ± 2%  |
| Resistance Temperature Coefficient | 1Ω~22KΩ<br>22KΩ~510KΩ<br>510KΩ~1MΩ<br>1MΩ~2.2MΩ<br>2.2MΩ~5.1MΩ | ± 300PPM/°C<br>± 450PPM/°C<br>± 800PPM/°C<br>± 1000PPM/°C<br>± 1400PPM/°C |

## Order Codes

### Order Codes (CF)

| CF          | 0.125W          | 100R                 |      | J                        |     | TB      |            |
|-------------|-----------------|----------------------|------|--------------------------|-----|---------|------------|
| Part Number | Rated Power (W) | Resistance Value (Ω) |      | Resistance Tolerance (%) |     | Package |            |
| CF          |                 | 1R                   | 1Ω   | G                        | ±2% | TB      | Taping Box |
| CFS         |                 | 10R                  | 10Ω  | J                        | ±5% |         |            |
|             |                 | 100R                 | 100Ω |                          |     |         |            |
|             |                 | 10K                  | 10KΩ |                          |     |         |            |
|             |                 | 10M                  | 10MΩ |                          |     |         |            |
|             |                 | 22M                  | 22MΩ |                          |     |         |            |



### ▶ General Information

#### General Purpose Resistors with Customized Service

Token Electronics is expanding business to include a broad range of General Purpose Resistor products designed for high volume applications. This expanded range of commercial resistor presents a more comprehensive product offering for Customer Experience Management (CEM) and other high volume customers that require quality products at competitive pricing.

Backed by the same customer service, technical support and quality assurance that Token has always provided, these new commercial products enable you the opportunity to source a wider range of resistors from a trusted supplier.

#### General Use

When an ambient temperature exceeds a rated ambient temperature, resistor shall be applied on the derating curve by derating the load power. General purpose resistor under overloads is not combustion resistant and is likely to emit, flame, gas, smoke, red heat, etc. Flame retardant resistor generally emits smoke and red heat in a certain power and over but do not emit fire or flame.

When resistors are shielded or coated with resin etc., stress from the storage heat and the resins are applied. So, performance and reliability should be checked well before use.

When a voltage higher than rated is applied in a short time (single pulse, repeated pulses, surge, etc.), it does not necessarily ensure safety that an effective wattage is not higher than a rated wattage. Then consult with us with your specified pulse wave shape. Resistors shall be used in a condition causing no dew condensation.

Keep temperature from rising by choosing resistor with a higher rated capacity; do not use a component having the exact load value required. For considerations of safety in extended period applications, the rating should be more than four times higher than the actual wattage involved, but never use resistors at less than 25% of its rated power.

In applications where resistors are subject to intermittent current surges and spikes, be sure in advance that the components selected are capable of withstanding brief durations of increased load.

Do not exceed the recommended rated load. Resistor must use within the rated voltage range to prevent the shortening of service life and/or failure of the wound resistance elements.

Minimum load: Resistor must be utilized at 1/10 or more of the rated voltage to prevent poor conductance due to oxidation build-up. For basic particulars for cautions, refer to EIAJ Technical Report RCR-2121 "Guidance for care note on fixed-resistors".

