

Version:
January 16, 2017



TOKEN

(TPUDHP)

Surface Mount Large Current Inductors

Token Electronics Industry Co., Ltd.

Taiwan: No.137, Sec. 1, Zhongxing Rd., Wugu District,
New Taipei City, Taiwan, R.O.C. 24872
Tel: +886 2981 0109 Fax: +886 2988 7487

China: 12F, Zhong Xing Industry Bld., Chuang Ye Road,
Nan Shan District, Shen Zhen City,
Guang Dong, China 518054
Tel: +86 755 26055363; Fax: +86 755 26055365

Web: www.token.com.tw

Email: rfq@token.com.tw



▶ Product Introduction

Token's Power Inductors utilize wire wound technology enabling up to 30A high current.

Features :

- Compact size and thin.
- Open magnetic circuit construction.
- Large current and lower DCR.

Applications :

- Notebook, DC-DC applications.
- power supply applications.

Token SMD unshielded (TPUDHP) series utilize wire wound technology with open magnetic circuit construction enabling cost-effective in manufacturing high rated current, low Ohmic resistance products.

The power (TPUDHP) inductors are wound around a ferrite core and are particularly suitable for cost-critical mass applications with their surface-mounting capability. These material saving (TPUDHP) inductors are ideal for applications such as storage chokes in DC/DC convertors as well as in the EMC sector.

TPU3316DHP wire wound with Mn-Zn material core rugged self-leaded construction composites for low-voltage and large-current DC-DC converter. Available inductance values for the TPU3316DHP are from 0.33 uH to 4.70 uH with rated current up to 20.00 A.

TPU1813DHP rugged self-leaded construction with advance wire wound technology enables large current, lower DCR, and less than 4.7mm height. It is ideal for high power DC-DC applications. Inductance values for the TPU1813DHP are from 0.56 uH to 47.00 uH with rated current up to 7.70 A.


TPU5022DHP's self-leaded and open magnetic circuit construction is specified for high current applications with up to 30.00 A IDC. Inductance range from 0.78 uH to 15.00 uH.

Custom parts are available on request. Token will also produce devices outside these specifications to meet specific customer requirements, contact us with your specific needs. For more information, please link to Token official website "[SMD Power Inductors](http://www.token.com.tw)".

► **Dimensions & Configurations**

Dimensions & Configurations (Unit: mm) (TPU1813DHP)

Type	A(max)	B(max)	C ± 0.2	D(max)	E	F	G
TPU1813DHP	9.10	6.10	4.80	4.70	3.50	2.20	4.80

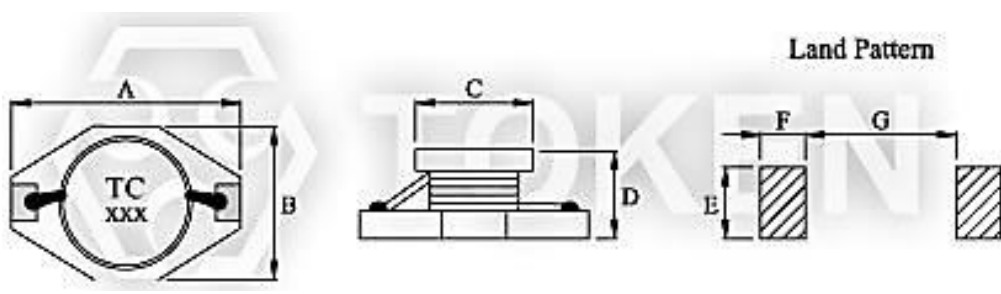

SMD Unshielded (TPU1813DHP) Dimensions

● Note: Design as Customer's Requested Specifications.

► **TPU1813DHP**

Electrical Characteristics (TPU1813DHP)

Part Number	Inductance (μH)	Test Freq. (KHz)	DCR (Ω)(max)	IDC (A)(max)
TPU1813DHP - R56N	0.56	100	0.010	7.70
TPU1813DHP - 1R2M	1.20	100	0.017	5.30
TPU1813DHP - 2R2M	2.20	100	0.035	3.50
TPU1813DHP - 4R7M	4.70	100	0.054	2.60
TPU1813DHP - 100M	10.00	100	0.111	1.90
TPU1813DHP - 150M	15.00	100	0.170	1.50
TPU1813DHP - 220M	22.00	100	0.250	1.20
TPU1813DHP - 330M	33.00	100	0.350	0.99
TPU1813DHP - 470M	47.00	100	0.470	0.87

● Note: Test Freq.: 100 KHz / 0.25V.
 Operating Temp.: -40°C ~ +85°C.
 Inductance drop=10% typ. at IDC.

▶ Order Codes

Order Codes (TPU1813DHP)

TPU1813DHP	-	R56		M	
Part Number		Inductance		Tolerance	
TPU1813DHP		R56	0.56μH	K	10%
		4R7	4.70μH	L	15%
		100	10.00μH	M	20%
				N	30%

▶ Product Introduction

Token's Power Inductors utilize wire wound technology enabling up to 30A high current.

Features :

- Compact size and thin.
- Open magnetic circuit construction.
- Large current and lower DCR.

Applications :

- Notebook, DC-DC applications.
- power supply applications.

Token SMD unshielded (TPUDHP) series utilize wire wound technology with open magnetic circuit construction enabling cost-effective in manufacturing high rated current, low Ohmic resistance products.

The power (TPUDHP) inductors are wound around a ferrite core and are particularly suitable for cost-critical mass applications with their surface-mounting capability. These material saving (TPUDHP) inductors are ideal for applications such as storage chokes in DC/DC convertors as well as in the EMC sector.



TPU3316DHP wire wound with Mn-Zn material core rugged self-leaded construction composites for low-voltage and large-current DC-DC converter. Available inductance values for the TPU3316DHP are from 0.33 uH to 4.70 uH with rated current up to 20.00 A.

TPU1813DHP rugged self-leaded construction with advance wire wound technology enables large current, lower DCR, and less than 4.7mm height. It is ideal for high power DC-DC applications. Inductance values for the TPU1813DHP are from 0.56 uH to 47.00 uH with rated current up to 7.70 A.

TPU5022DHP's self-leaded and open magnetic circuit construction is specified for high current applications with up to 30.00 A IDC. Inductance range from 0.78 uH to 15.00 uH.

Custom parts are available on request. Token will also produce devices outside these specifications to meet specific customer requirements, contact us with your specific needs. For more information, please link to Token official website "[SMD Power Inductors](http://www.token.com.tw)".


► **Dimensions & Configurations**

Dimensions & Configurations (Unit: mm) (TPU3316DHP)

Type	A(max)	B ± 0.3	C(max)	D(max)	E	F	G
TPU3316DHP	9.91	8.38	6.35	13.21	4.06	1.52	8.64



SMD Unshielded (TPU3316DHP) Series

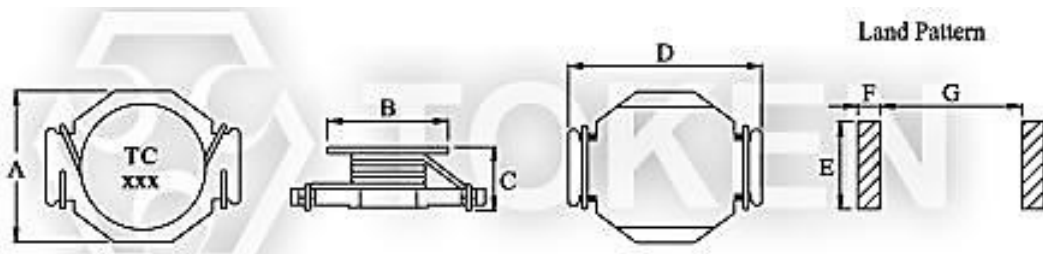

SMD Unshielded (TPU3316DHP) Dimensions

- Note: Power inductor can be custom design as customer's requested specifications.

▶ **TPU3316DHP**

Electrical Characteristics (TPU3316DHP)

Part Number	Inductance(μ H)	Test Freq.(KHz)	DCR (Ω)(max)	IDC (A)(max)
TPU3316DHP - R33N	0.33	100	0.002	20.00
TPU3316DHP - R68N	0.68	100	0.005	13.00
TPU3316DHP - 1R0N	1.00	100	0.006	11.00
TPU3316DHP - 1R5M	1.50	100	0.008	9.00
TPU3316DHP - 2R2M	2.20	100	0.011	7.80
TPU3316DHP - 2R7M	2.70	100	0.012	7.00
TPU3316DHP - 3R3M	3.30	100	0.014	6.40
TPU3316DHP - 4R7M	4.70	100	0.018	5.40

- Note: Test Freq.: 100 KHz / 0.25V.
Operating Temp.: -40°C ~ +85°C.
Inductance drop=10% typ. at IDC.

▶ **Order Codes**

Order Codes (TPU3316DHP)

TPU3316DHP	-	R33		N	
Part Number		Inductance		Tolerance	
TPU3316DHP		R33	0.33 μ H	K	10%
		1R5	1.50 μ H	L	15%
				M	20%
				N	30%

▶ Product Introduction

Token's Power Inductors utilize wire wound technology enabling up to 30A high current.

Features :

- Compact size and thin.
- Open magnetic circuit construction.
- Large current and lower DCR.

Applications :

- Notebook, DC-DC applications.
- power supply applications.

Token SMD unshielded (TPUDHP) series utilize wire wound technology with open magnetic circuit construction enabling cost-effective in manufacturing high rated current, low Ohmic resistance products.

The power (TPUDHP) inductors are wound around a ferrite core and are particularly suitable for cost-critical mass applications with their surface-mounting capability. These material saving (TPUDHP) inductors are ideal for applications such as storage chokes in DC/DC convertors as well as in the EMC sector.



TPU3316DHP wire wound with Mn-Zn material core rugged self-leaded construction composites for low-voltage and large-current DC-DC converter. Available inductance values for the TPU3316DHP are from 0.33 uH to 4.70 uH with rated current up to 20.00 A.

TPU1813DHP rugged self-leaded construction with advance wire wound technology enables large current, lower DCR, and less than 4.7mm height. It is ideal for high power DC-DC applications. Inductance values for the TPU1813DHP are from 0.56 uH to 47.00 uH with rated current up to 7.70 A.

TPU5022DHP's self-leaded and open magnetic circuit construction is specified for high current applications with up to 30.00 A IDC. Inductance range from 0.78 uH to 15.00 uH.

Custom parts are available on request. Token will also produce devices outside these specifications to meet specific customer requirements, contact us with your specific needs. For more information, please link to Token official website "[SMD Power Inductors](http://www.token.com.tw)".

► **Dimensions & Configurations**


Dimensions & Configurations (Unit: mm) (TPU5022DHP)

Type	A(max)	B ± 0.3	C(max)	D(max)	E	F	G
TPU5022DHP	16.26	12.70	8.00	22.35	8.64	3.18	14.35



www.token.com.tw

SMD Unshielded (TPU5022DHP) Series

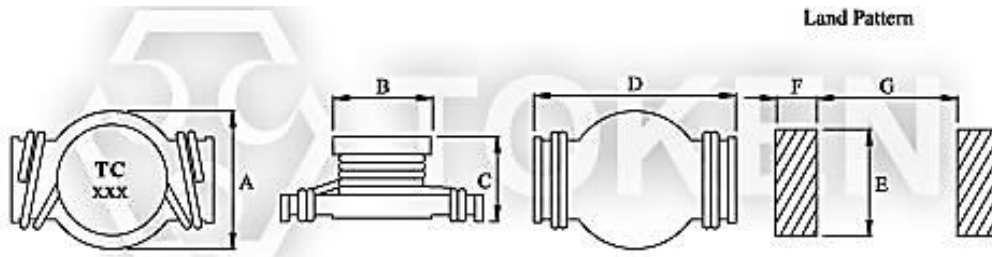

SMD Unshielded (TPU5022DHP) Dimensions

● **Note: Design as Customer's Requested Specifications.**

▶ TPU5022DHP

Electrical Characteristics (TPU5022DHP)

Part Number	Inductance(μ H)	Test Freq.(KHz)	DCR (Ω)(max)	IDC (A)(max)
TPU5022DHP - R78N	0.78	100	0.0026	30.00
TPU5022DHP - 1R5M	1.50	100	0.0040	25.00
TPU5022DHP - 2R2M	2.20	100	0.0061	20.00
TPU5022DHP - 3R3M	3.30	100	0.0086	17.00
TPU5022DHP - 3R9M	3.90	100	0.010	15.00
TPU5022DHP - 4R7M	4.70	100	0.014	13.00
TPU5022DHP - 6R0M	6.00	100	0.017	12.00
TPU5022DHP - 7R8M	7.80	100	0.018	11.00
TPU5022DHP - 100M	10.00	100	0.026	10.00
TPU5022DHP - 150M	15.00	100	0.032	8.00

- Note: Test Freq.: 100KHz / 0.1V
Operating Temp.: -40°C ~ +85°C.
Inductance drop=10% typ. at IDC.

▶ Order Codes

Order Codes (TPU5022DHP)

TPU5022DHP	-	R78		N	
Part Number		Inductance		Tolerance	
TPU5022DHP		R78	0.78 μ H	K	10%
		1R5	1.50 μ H	L	15%
		100	10.00 μ H	M	20%
				N	30%

► General Information

How to Quickly Search Inductor for all of the Characteristics?

Quickly Search Inductor Finder

Searching and comparing data sheets of inductor manufacturers can be time consuming. Token's Parameter Sorting Search Mode allows selection of inductors based on different parameters.

By entering just the inductance value,

By sorting parameter to narrow down searching range,

Or by enter keyword / part number / size dimensions L*W*H to partial or exact searching.

Leading-Edge Technology

Token Electronics brand passive component specializes in standard and custom solutions offering the latest in state-of-the-art low profile high power density inductor components. Token provides cost-effective, comprehensive solutions that meet the evolving needs of technology-driven markets. In working closely with the industry leaders in chipset and core development, we remain at the forefront of innovation and new technology to deliver the optimal mix of packaging, high efficiency and unbeatable reliability. Our designs utilize high frequency, low core loss materials, new and custom core shapes in combination with innovative construction and packaging to provide designers with the highest performance parts available on the market.

Find Inductor Solutions Faster

Find Your Inductor - wt.moc.nekot@qfr

Only timely and accurate information can help manage the changing needs of your customers. The Token Inductor Finder puts you only a click away from all of the inductor information you need.

Find Your Solution - wt.moc.nekot@qfr

Selecting the correct inductor solution will not only save you time, but it will give you a competitive edge. At Token, we are committed to helping you find the most efficient alternative for your power design. Our inductor and power supply design experts can help you make that selection.

Please forward us:

- A brief description of your particular application's requirements.
- Details of an existing solution that you'd like to replace, enhance or find an alternative.
- Inquiries for feasibility to tailor a power transformer or inductor to your specific application.

We can also help you with any additional technical information you might need relating to any of our products.

Ask Us Today