

Version:  
June 27, 2017



# TOKEN

## (TPULF)

# Power Inductors

### **Token Electronics Industry Co., Ltd.**

**Taiwan:** No.137, Sec. 1, Zhongxing Rd., Wugu District,  
New Taipei City, Taiwan, R.O.C. 24872  
Tel: +886 2981 0109 Fax: +886 2988 7487

**China:** 12F, Zhong Xing Industry Bld., Chuang Ye Road,  
Nan Shan District, Shen Zhen City,  
Guang Dong, China 518054  
Tel: +86 755 26055363; Fax: +86 755 26055365

[Web: www.token.com.tw](http://www.token.com.tw)

[Email: rfq@token.com.tw](mailto:rfq@token.com.tw)



## ▶ Product Introduction

### Token TPULF Unshielded SMD Power Inductors Cut Down On Resistance.

#### Features :

- Low profile (3.5mm Height and 7.4mm Width max.)
- High-Current Inductor with Lowest DCR.

#### Applications :

- Notebook, Portable communication equipments, DC/DC converters, etc..

Token produces a wide and varied range of surface mount inductors that are ideal for all portable applications. Other application areas include: telecommunications, consumer and industrial electronics. In order to handle high rated current, SMD inductors must have a low ohmic resistance and minimal losses at high frequencies. Token (TPULF7032/7045) surface mount unshielded series are designed for high-current with lowest DCR wire-wound inductors.



With a footprint of 7.4 x 7.4 mm, the (TPULF7032) version has an insertion height of 3.5 mm. Available inductance values for the new (TPULF7032) are from 1.00 uH to 100.00 uH with rated current up to 2.88A. With inductance values from 1.00 uH to 1000.00 uH, the (TPULF7045) has a rated current up to 2.8A. Thanks to its temperature stability, it can be used in ambient temperatures ranging from -40°C ~ +85°C.

The chip inductors are wound around a ferrite core and are particularly suitable for cost-critical mass applications thanks to their surface-mounting capability. These material saving power inductors are ideal for applications such as storage chokes in DC/DC converters as well as in the EMC sector.

Token (TPULF7032/7045) series conform to the RoHS directive and Lead-free. Custom parts are available on request.


Token will also produce devices outside these specifications to meet specific customer requirements, Please contact our sales or link to Token official website "[SMD Power Inductors](http://www.token.com.tw)" for more information.



► **Dimensions**

**Dimensions & Configurations (Unit: mm) (TPULF7032/7045)**

Type	A Max.	B Max.	C Max.	D ± 0.2	E Max.	F	G	H
TPULF7032	7.4	7.4	3.5	2.0	5.4	3.0	2.0	4.4
TPULF7045	7.4	7.4	5.1	2.0	5.4	3.0	2.0	4.4

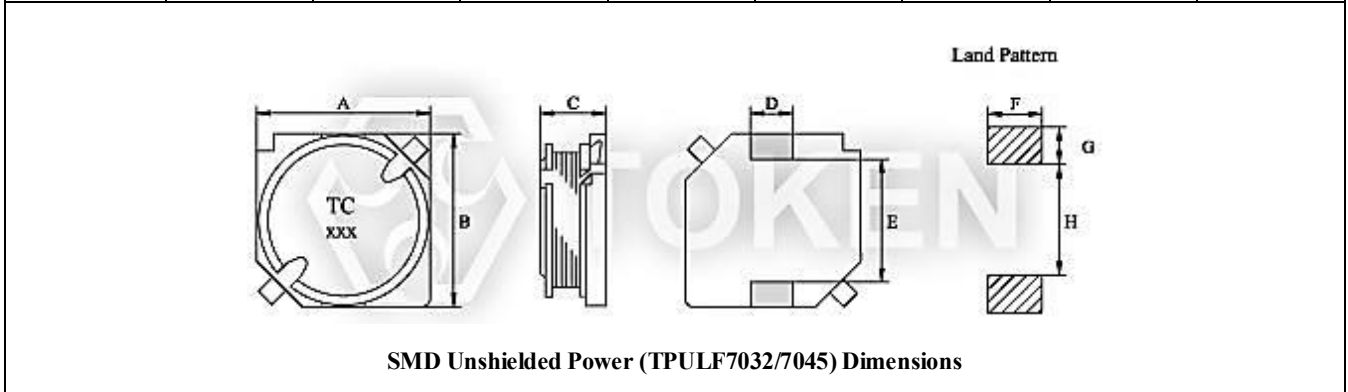

Note: Design as Customer's Requested Specifications.

▶ **TPULF7032**

**Electrical Characteristics (TPULF7032)**

Part Number	Inductance (μH)	Test Freq. (KHz)	DCR (Ω) Max.	IDC (A) Max.
TPULF7032 - 1R0M	1.00	1	0.022	2.88
TPULF7032 - 1R5M	1.50	1	0.026	2.67
TPULF7032 - 2R2M	2.20	1	0.032	2.40
TPULF7032 - 3R3M	3.30	1	0.041	2.08
TPULF7032 - 4R7M	4.70	1	0.049	1.92
TPULF7032 - 6R8M	6.80	1	0.067	1.60
TPULF7032 - 100M	10.00	1	0.085	1.41
TPULF7032 - 120M	12.00	1	0.100	1.28
TPULF7032 - 150M	15.00	1	0.130	1.12
TPULF7032 - 180M	18.00	1	0.160	1.00
TPULF7032 - 220M	22.00	1	0.180	0.93
TPULF7032 - 270M	27.00	1	0.240	0.80
TPULF7032 - 330M	33.00	1	0.290	0.72
TPULF7032 - 390M	39.00	1	0.340	0.66
TPULF7032 - 470M	47.00	1	0.410	0.59
TPULF7032 - 560M	56.00	1	0.480	0.55
TPULF7032 - 680M	68.00	1	0.600	0.49
TPULF7032 - 820M	82.00	1	0.710	0.44
TPULF7032 - 101M	100.00	1	0.950	0.38

Note:

- Test Freq.: 1KHz / 0.25V.
- Operating Temp.: -40°C ~ +85°C.
- Inductance drop=10% typ. at IDC.



▶ TPULF7045

Electrical Characteristics (TPULF7045)

Part Number	Inductance (μH)	Test Freq. (KHz)	DCR (Ω) Max.	IDC (A) Max.
TPULF7045 - 1R0M	1.00	1	0.023	2.880
TPULF7045 - 1R5M	1.50	1	0.028	2.560
TPULF7045 - 2R2M	2.20	1	0.032	2.360
TPULF7045 - 2R7M	2.70	1	0.035	2.360
TPULF7045 - 3R3M	3.30	1	0.038	2.160
TPULF7045 - 3R9M	3.90	1	0.042	2.160
TPULF7045 - 4R7M	4.70	1	0.049	1.880
TPULF7045 - 5R6M	5.60	1	0.055	1.880
TPULF7045 - 6R8M	6.80	1	0.060	1.680
TPULF7045 - 8R2M	8.20	1	0.067	1.680
TPULF7045 - 100M	10.00	1	0.070	1.560
TPULF7045 - 120M	12.00	1	0.080	1.440
TPULF7045 - 150M	15.00	1	0.090	1.360
TPULF7045 - 180M	18.00	1	0.100	1.280
TPULF7045 - 220M	22.00	1	0.120	1.170
TPULF7045 - 270M	27.00	1	0.140	1.070
TPULF7045 - 330M	33.00	1	0.160	1.000
TPULF7045 - 390M	39.00	1	0.190	0.910
TPULF7045 - 470M	47.00	1	0.220	0.840
TPULF7045 - 560M	56.00	1	0.290	0.720
TPULF7045 - 680M	68.00	1	0.340	0.660
TPULF7045 - 820M	82.00	1	0.460	0.580
TPULF7045 - 101M	100.00	1	0.550	0.510
TPULF7045 - 121M	120.00	1	0.670	0.420
TPULF7045 - 151M	150.00	1	0.900	0.370
TPULF7045 - 181M	180.00	1	1.050	0.350
TPULF7045 - 221M	220.00	1	1.350	0.290
TPULF7045 - 271M	270.00	1	1.550	0.280
TPULF7045 - 331M	330.00	1	2.050	0.230
TPULF7045 - 391M	390.00	1	2.300	0.215
TPULF7045 - 471M	470.00	1	2.600	0.195
TPULF7045 - 561M	560.00	1	2.900	0.185
TPULF7045 - 681M	680.00	1	3.400	0.170
TPULF7045 - 821M	820.00	1	4.200	0.165
TPULF7045 - 102M	1000.00	1	5.390	0.150

Note:

- Test Freq.: 1KHz / 0.25V.
- Operating Temp.: -40°C ~ +85°C.
- Inductance drop=10% typ. at IDC.



▶ Order Codes

Order Codes (TPULF7032/7045)

TPULF7032	-	1R0		M	
Part Number		Inductance		Tolerance	
TPULF7032		1R0	1.00μH	K	10%
TPULF7045		120	12.00μH	L	15%
		121	120.00μH	M	20%
				N	30%

## ► General Information

### How to Quickly Search Inductor for all of the Characteristics?

#### Quickly Search Inductor Finder

Searching and comparing data sheets of inductor manufacturers can be time consuming. Token's Parameter Sorting Search Mode allows selection of inductors based on different parameters.

By entering just the inductance value,

By sorting parameter to narrow down searching range,

Or by enter keyword / part number / size dimensions L\*W\*H to partial or exact searching.

#### Leading-Edge Technology

Token Electronics brand passive component specializes in standard and custom solutions offering the latest in state-of-the-art low profile high power density inductor components. Token provides cost-effective, comprehensive solutions that meet the evolving needs of technology-driven markets. In working closely with the industry leaders in chipset and core development, we remain at the forefront of innovation and new technology to deliver the optimal mix of packaging, high efficiency and unbeatable reliability. Our designs utilize high frequency, low core loss materials, new and custom core shapes in combination with innovative construction and packaging to provide designers with the highest performance parts available on the market.

#### Find Inductor Solutions Faster

##### Find Your Inductor - wt.moc.nekot@qfr

Only timely and accurate information can help manage the changing needs of your customers. The Token Inductor Finder puts you only a click away from all of the inductor information you need.

##### Find Your Solution - wt.moc.nekot@qfr

Selecting the correct inductor solution will not only save you time, but it will give you a competitive edge. At Token, we are committed to helping you find the most efficient alternative for your power design. Our inductor and power supply design experts can help you make that selection.

Please forward us:

- A brief description of your particular application's requirements.
- Details of an existing solution that you'd like to replace, enhance or find an alternative.
- Inquiries for feasibility to tailor a power transformer or inductor to your specific application.

We can also help you with any additional technical information you might need relating to any of our products.

**Ask Us Today**

