

Version:
January 12, 2017



(XT MJ)
Trap Filters

Token Electronics Industry Co., Ltd.

Taiwan: No.137, Sec. 1, Zhongxing Rd., Wugu District,
New Taipei City, Taiwan, R.O.C. 24872
Tel: +886 2981 0109 Fax: +886 2988 7487

China: 12F, Zhong Xing Industry Bld., Chuang Ye Road,
Nan Shan District, Shen Zhen City,
Guang Dong, China 518054
Tel: +86 755 26055363; Fax: +86 755 26055365

[Web: www.token.com.tw](http://www.token.com.tw)

[Email: rfq@token.com.tw](mailto:rfq@token.com.tw)



▶ Product Introduction

Token (XT MJ) for Chrominance Carrier is Murata Trap Filter TPS MJ Series Compatible.

Features :

- RoHS Compliant.
- TV SIF stage use.
- Low insertion loss.
- Wide bandwidth Ceramic Trap.
- Excellent spurious suppression characteristics.

(XT MJ) Trap Filter Quick Selection :


- Dimensions (Unit: mm): 10.0 max x 10.0 max x 5.0 max.
- XT3.58MJ Cener Frequency f_0 :3.58MHz; 20db min @ f_0 ; 20(kHz)min@20dB Att BW
- XT4.43MJ Cener Frequency f_0 :4.43MHz; 20db min @ f_0 ; 40(kHz)min@20dB Att BW
- XT4.5MJ Cener Frequency f_0 :4.5MHz; 20db min @ f_0 ; 40(kHz)min@20dB Att BW
- XT5.74MJ Cener Frequency f_0 :5.74MHz; 20db min @ f_0 ; 40(kHz)min@20dB Att BW
- XT5.5MJ Cener Frequency f_0 :5.5MHz; 20db min @ f_0 ; 40(kHz)min@20dB Att BW
- XT6.0MJ Cener Frequency f_0 :6.0MHz; 20db min @ f_0 ; 40(kHz)min@20dB Att BW
- XT6.5MJ Cener Frequency f_0 :6.5MHz. 20db min @ f_0 ; 40(kHz)min@20dB Att BW

(XT MJ) Series are band reject device used for video and sound IF attenuation. The 2 terminal (XT MJ) Series can be used to attenuate either the sound signal in B/W receivers or the Chroma signal in video. Contact us with your specific needs. For more information, please link to Token official website "[Ceramic Trap Filters](#)".



▶ Dimensions


Dimensions (Unit: mm) (XT MJ)

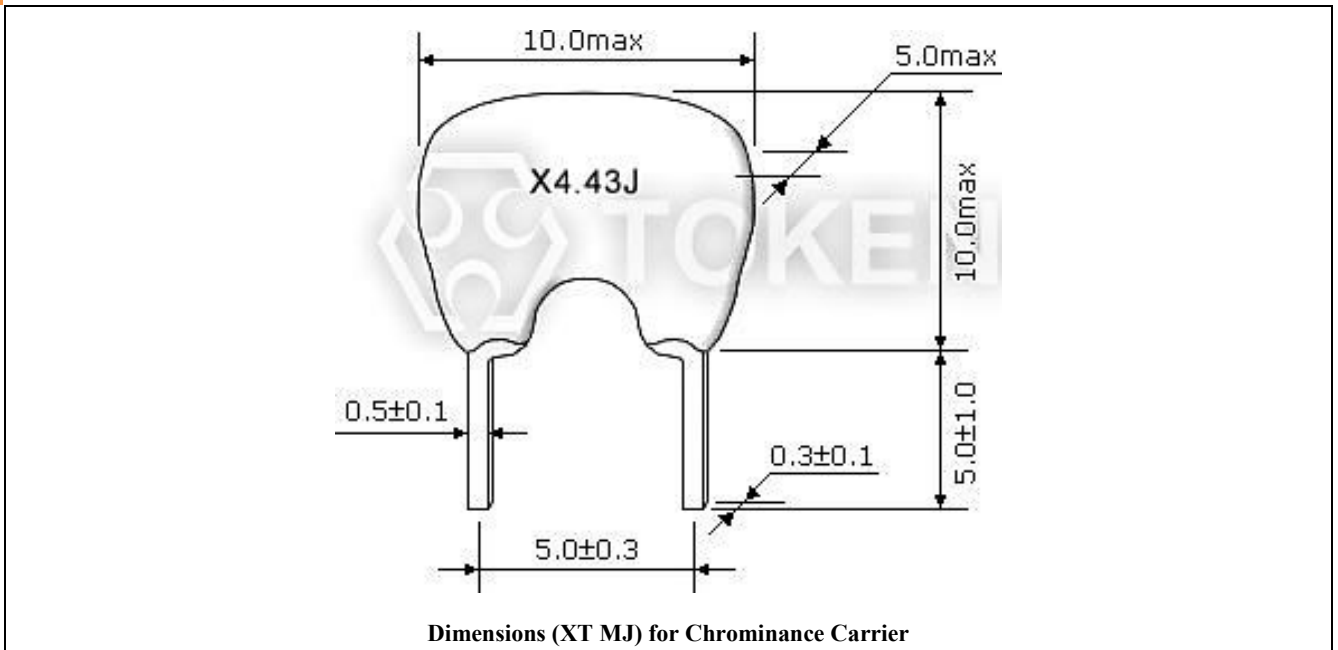

Characteristics

Characteristics (XT MJ)


Part Number	Center Frequency (fo1)(MHz)	Attenuation (at fo1)(dB)min	20dB Attenuation BW (fo1)(kHz)min
XT3.58MJ	3.580	20	20
XT4.43MJ	4.430	20	40
XT4.5MJ	4.500	20	40
XT5.5MJ	5.500	20	40
XT5.74MJ	5.742	20	40
XT6.0MJ	6.000	20	40
XT6.5MJ	6.500	20	40

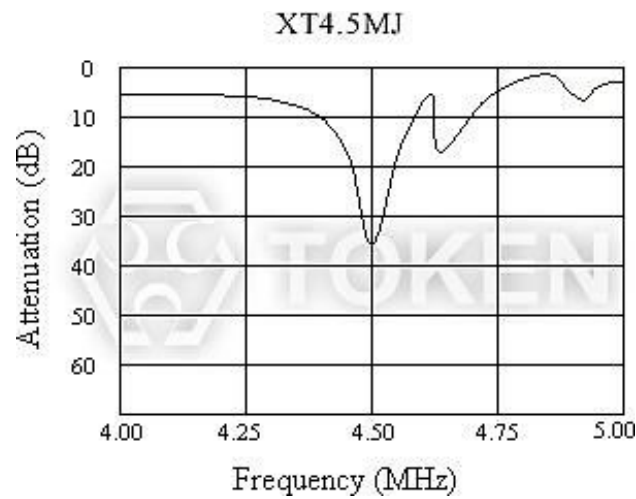

- The level at 1MHz shall be made for a reference (0dB).

▶ Test Circuit

Test Circuit (XT MJ)

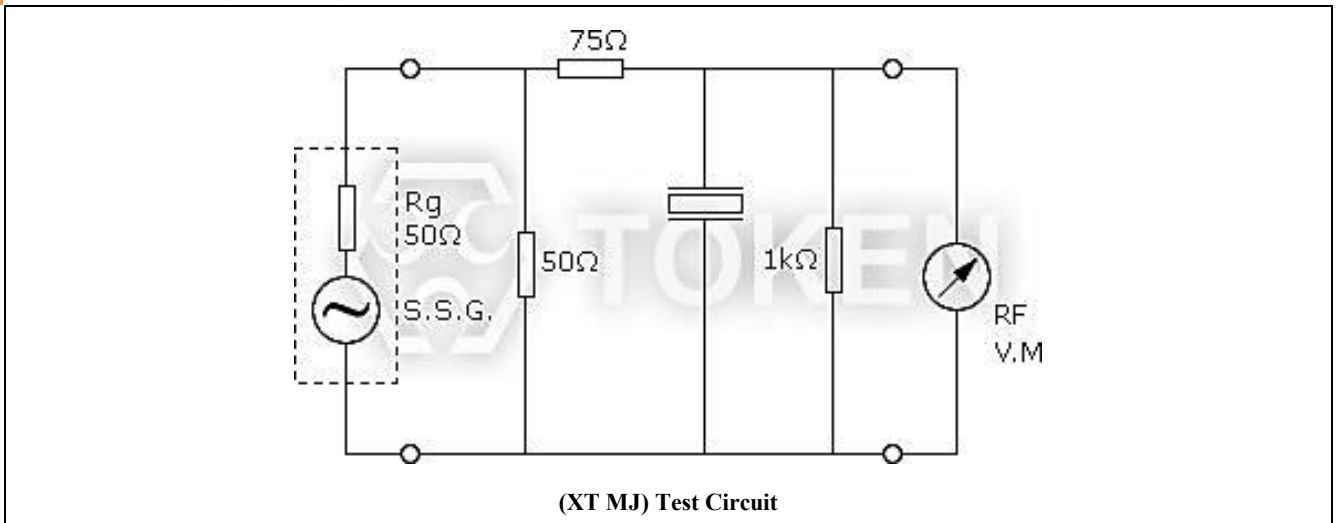

▶ Order Codes

Order Codes (XT MJ)

XT3.58MJ	P
Part Number	Package

▶ General Information

Advantage of Token Piezoelectric Trap Filters

Token Electronics had been able to develop specialized piezo materials which when combined with an advance design have resulted in a complete line of practical, inexpensive piezo devices for entertainment and communications applications.

Token reliably deliver high-quality components according to the each customer special needs with respect to performance, costs, and technology modifications.

For marketing discontinuations or sourcing activities concerning Piezoelectric "Trap" products, you are encouraged to contact our Sales Department so the request can be properly directed within Token.